




# OLLARI & CONTI

## CLEANING SCREEN

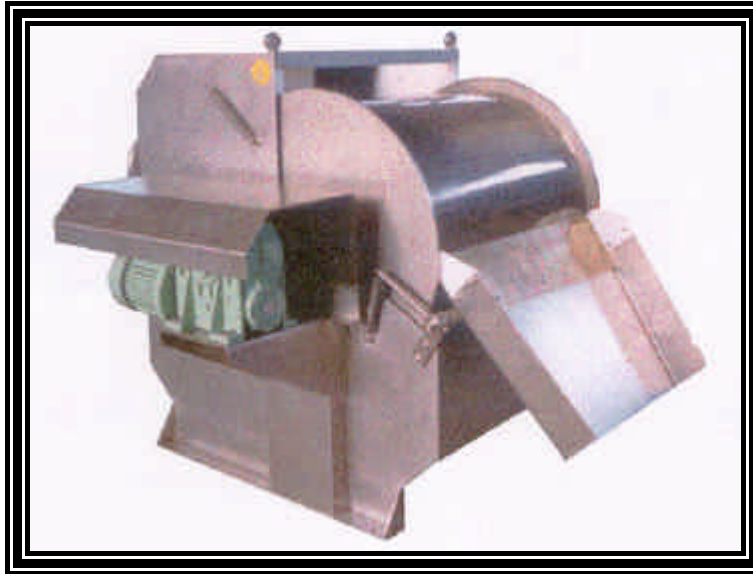

### CLEANING SCREEN

The cleaning screen is a machine specifically designed for the solid-liquid separation of sewage. It is widely used in all systems that require high-capacity separators. This machine is easily installed and it does not require any labour for its operation. Maintenance and energy consumption are reduced to the minimum. This machine can be used for various applications which include the food and livestock industry, wine industry, tanneries and paper mills. Within the civil field, it can be used for water and mud treatment.



#### Technical characteristics

Model	Drum length mm	Height mm	Width mm	Length mm	Power kW
Micaf 40	400	1080	950	1300	0.55
Micaf 60	600	1080	1150	1300	0.55
Micaf 90	900	1080	1450	1300	0.55
Micaf 120	1200	1080	1750	1300	0.55
Micaf 180	1800	1080	2350	1300	0.55
Micaf 300	3000	1700	3700	1700	1.1

#### Capacities (m<sup>3</sup>/h-OPENING)

- indicative values refer to sewage with suspended solids equal to 200ppm in volume -



Drum opening	0.25	0.5	0.75	1	1.2	1.5	2	2.5
Micaf 40	30	50	70	84	95	110	118	120
Micaf 60	60	105	140	175	195	218	235	240
Micaf 90	90	153	212	258	295	333	358	360
Micaf 120	118	208	278	345	387	436	468	470
Micaf 180	183	280	425	514	587	664	712	720
Micaf 300	420	720	1000	1200	1400	1600	1900	2100

Subject to change without notice.

OLLARI E CONTI s.r.l.

Via Sonnino 18/a • 43100 Parma (Italy)

Tel. +39 0521/992228 • Fax +39 0521/994249

<http://www.ollarieconti.it> • e-mail: [info@ollarieconti.it](mailto:info@ollarieconti.it)

Machines and complete lines for tripe and intestine operations for beef, pig and sheep